


ZX80 FULLY RUGGED TABLET



- Processeur 8 cœurs Qualcomm® QCS6490
- Écran LumiBond FHD de 8 pouces avec technologie Getac de lecture en plein soleil (1 000 nits) et écran tactile capacitif
- Batterie remplaçable à chaud pour un fonctionnement ininterrompu sur le terrain
- Certification MIL-STD-810H et IP67, avec résistance aux chutes de 1,8 m (6 pi)
- Plusieurs configurations avec des outils de gestion de niveau entreprise dans un facteur de forme fin et léger
- Vérifié comme Android enterprise recommended¹



ZX80 3D demo

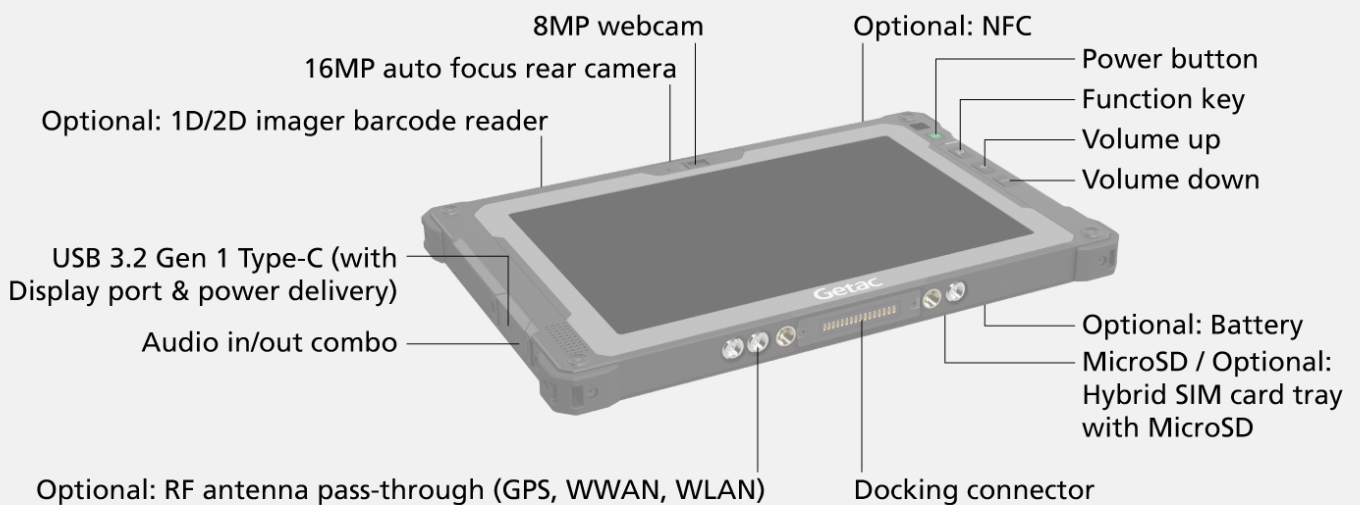

SPECIFICATIONS

Generation
G1

Operating System
Android™ 13.0 ⁱ

Mobile Computing Platform
Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

Graphics
Qualcomm® Adreno™ 643 GPU

NPU
Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display
8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
12GB LPDDR5, 256GB UFS

Keyboard
Power button
3 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: NFC ⁱⁱ

I/O Interface
8MP webcam x 1
16MP auto focus rear camera x 1
Audio in/out combo x 1
USB 3.2 Gen 1 Type-C (with Display port & power delivery) x 1
MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 4FF) tray with MicroSD x 1 ⁱⁱⁱ
Docking connector x 1
Optional: SIM card slot x 1 (Nano-SIM, 4FF) ^{xi}
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Communication Interface
Wi-Fi 6E 802.11ax
Bluetooth (v5.2) ^{iv}
Optional: Dedicate GPS ^v
Optional: 4G LTE mobile broadband ⁱⁱⁱ
Optional: 5G Sub-6 ⁱⁱⁱ
Optional: Dual SIM (Nano-SIM 4FF and e-SIM) ^{iii, xi}

Security Feature
Optional: NFC ⁱⁱ

Power
Internal battery (3.86V, typical 4060mAh; min. 3950mAh)
LifeSupport battery swappable technology

Swappable Battery Options:
Battery bay cover (Default)
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh)

Dimension (W x D x H) & Weight
234 x 149.8 x 17.6mm (9.21" x 5.89" x 0.69")
590g (1.3lbs) ^{vi}

Rugged Feature
MIL-STD-810H certified
IP67 certified
Vibration & 6ft (1.8m) drop resistant ^{vii}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) ^{viii}

Environmental Specification
Temperature ^{ix}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Meet and photos)
Getac Log Tool
Getac Diagnostic
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

Optional software
Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

Accessories
Optional:
Carry bag
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh)
DC-DC vehicle adapter (65W, 11-32VDC)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hand strap with stylus holder
Rotating hand strap with kickstand
Shoulder strap (2-point)
Vehicle cradle ⁵
Vehicle dock ⁵
Office dock
65W USB-C AC Adapter

Bumper-to-Bumper warranty
Les accidents surviennent quand on s’y attend le moins, en particulier lorsque les produits sont soumis à des conditions difficiles, et peuvent engendrer une mise hors service des équipements et des périodes d’ interruption très coûteuses. C’est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c’est la tranquillité d’esprit assurée. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard
3 ans Bumper-to-Bumper

ZX80 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Gamber-Johnson vehicle dock and cradle are e-mark certified.
- XI. Units with 4G/5G option come with an embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock (Gamber-Johnson)	Vehicle Dock (RAM Mounts)
Serial Port	1	-
Audio In/Out Combo	-	-
DC In Jack	-	-
USB	USB 2.0 x 2	USB 2.0 x 2
LAN	1	1
HDMI	-	-
RF Antenna Connector	3 (option) (WWAN, WLAN, GPS)	-
Kensington Lock	-	-



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.